

ARDEX B 24™

Concrete Ramping Mortar

Trowel-Grade Horizontal Concrete
Repair Mortar




Key Features

- Integral corrosion inhibitor
- Holds shape for ramping and balconies Easy to apply
- Suitable for normal service commercial, institutional and multi-unit residential applications

Installation

- **Mixing Ratio:** 4 – 4.25 qts (3.785 – 4.022 L) of water per 55 lb (25 kg) bag
- **Coverage:** 0.46 cu. ft. per 55 lb. bag (0.01 m³ per 25 kg bag)
22 sq. ft. per 55 lb. bag at 1/4"
(2.04 m² per 25 kg bag at 6 mm)
- **Compressive Strength:** (ASTM C109): 7 days: 6800 psi
28 days: 7900 psi
- **Pot Life / Working Time:** 25 - 45 minutes
- **Time to Traffic:** Light foot: 2 - 4 hours
Normal foot: 3 days
Full, including rolling loads: 5 - 7 days
- **Coat or Seal (Minimum):** 3 - 7 days
- **Color:** Gray

For complete technical documentation, please see the Technical Data Sheet at www.ardexamericas.com

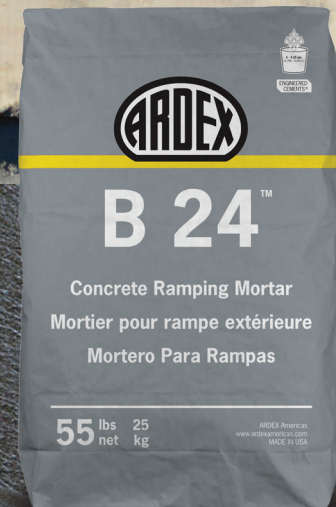

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339

www.ardexamericas.com

systemONE™
warranty

